

ASSEMBLY HARDWARE



- A. Black MDF tabletop
- B. Black MDF base with feet
- **C.** Inflatable insert
- **D** Prin
- E. Manual air pump (optional)
- **F.** Battery-operated LED push lights (backlit only)




ASSEMBLY

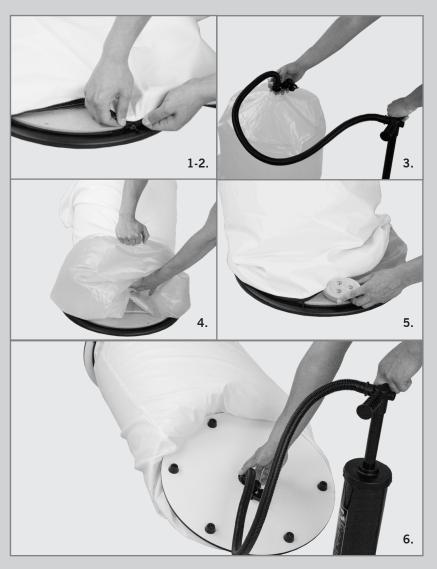


- Place base and tabletop on the ground with the zippered sections facing up.
- 2. Attach the print to the tabletop by zippering the two together. (Make sure the top of the print is facing toward the tabletop.)
- **3.** Open only the black valve on the inflatable insert, not the entire valve. Insert the air hose valve into the black valve. Pump up the insert until it's 3/4 full.
- **4.** Close the valve and place the insert into the print with the valve facing toward the open section.
- 5. Attach the base and the print by zippering them together. For the backlit version, place a light between the insert and the base. (24" model gets 1 light at the bottom; 40" model gets 1 light at top and 1 at bottom. See second page to attach the light to the base). When this is done, zip both ends shut.
- **6.** Lay the table on its side. Open the black valve and insert the air hose valve. Pump until entirely full. Be careful not to over-inflate.

ASSEMBLY HARDWARE

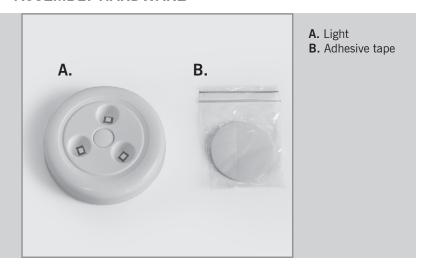



ASSEMBLY

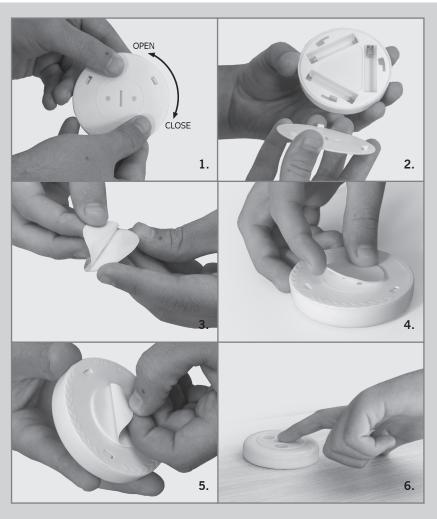

- 1. Twist the bottom of the light to open the battery section.
- 2. Insert three triple-A batteries into the inserts. (Batteries are not included.)
- To add the adhesive bottom, peel the film of sticky strip off.
- **4.** Place adhesive strip on the bottom.
- **5.** Peel off the film backing.
- **6.** Position the light onto the base and press firmly to ensure the light is secured.