


ASSEMBLY HARDWARE

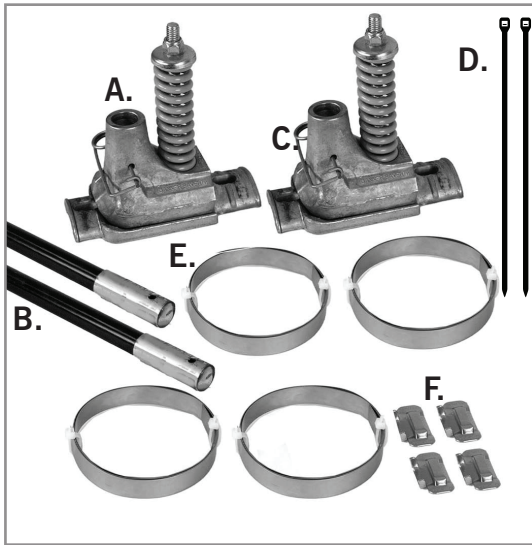


- A. 2 Brackets
- B. 2 Fiberglass Arms (4" will stick out once banner is added)
- C. 2 Pins
- D. 2 Zip Ties
- E. 4 Heavy Bands
- F. 4 Buckles

Things you will need:

- Customers need a safe way to reach where they want the pole banner
- Banding tool
- Tape measure
- Marker
- Tin Snips or scissors
- Tape
- Hammer



ASSEMBLY

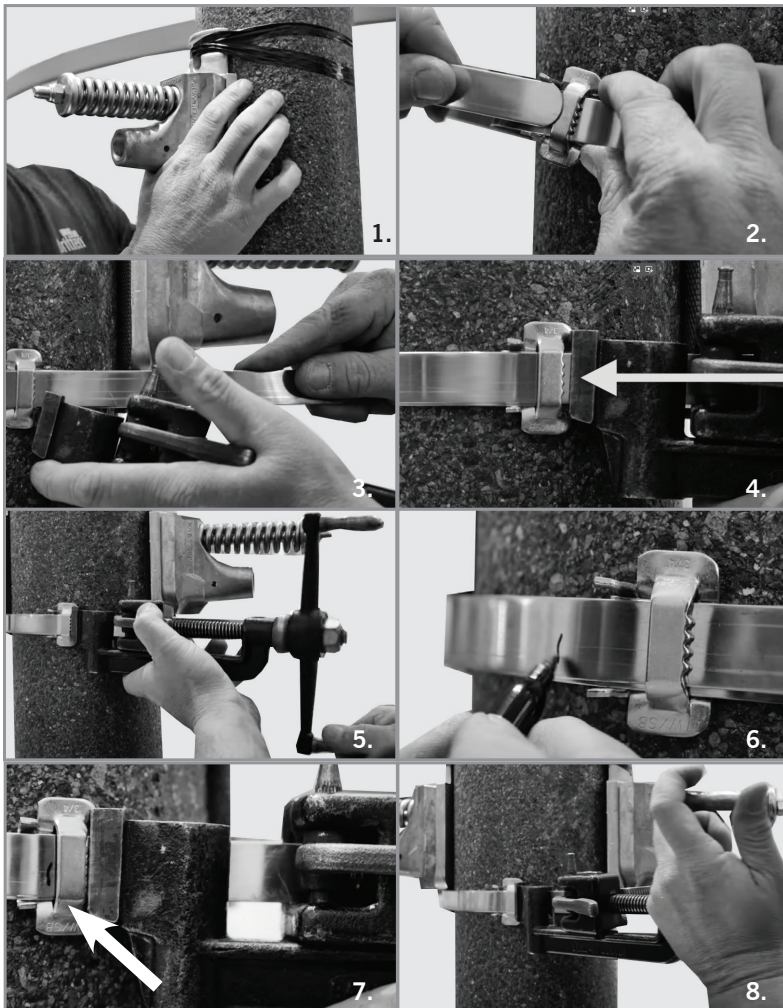


Helpful Tips for installation:

- Install them from the top to the bottom.
- Install the banner at the same time as you install the brackets.
- Recommend installing the banners at least 15' from the ground
- Spring position matters. Top bracket needs the spring on top, the bottom bracket needs the spring on the bottom.

1. Position the bracket on the pole and tape it to the pole.
2. Wrap the banding around the pole twice, through the buckle each time.
3. Bend the band towards the buckle to hold it in place so you can grab the banding tool. Slide the band through the tool nose and gripper block.
4. Squeeze the lever. You will want the buckle to rest against the nose of the tool.
5. Use the spinner to apply tension to the band by turning it clockwise.
6. Once the band is snug, use the marker to draw a line on the band about a half inch from the buckle.
7. Tighten with the banding tool till that line is hidden under the buckle.
8. When the band and buckle are tight, back off the tension slightly by turning the handles counterclockwise 1/2 turn.

ASSEMBLY

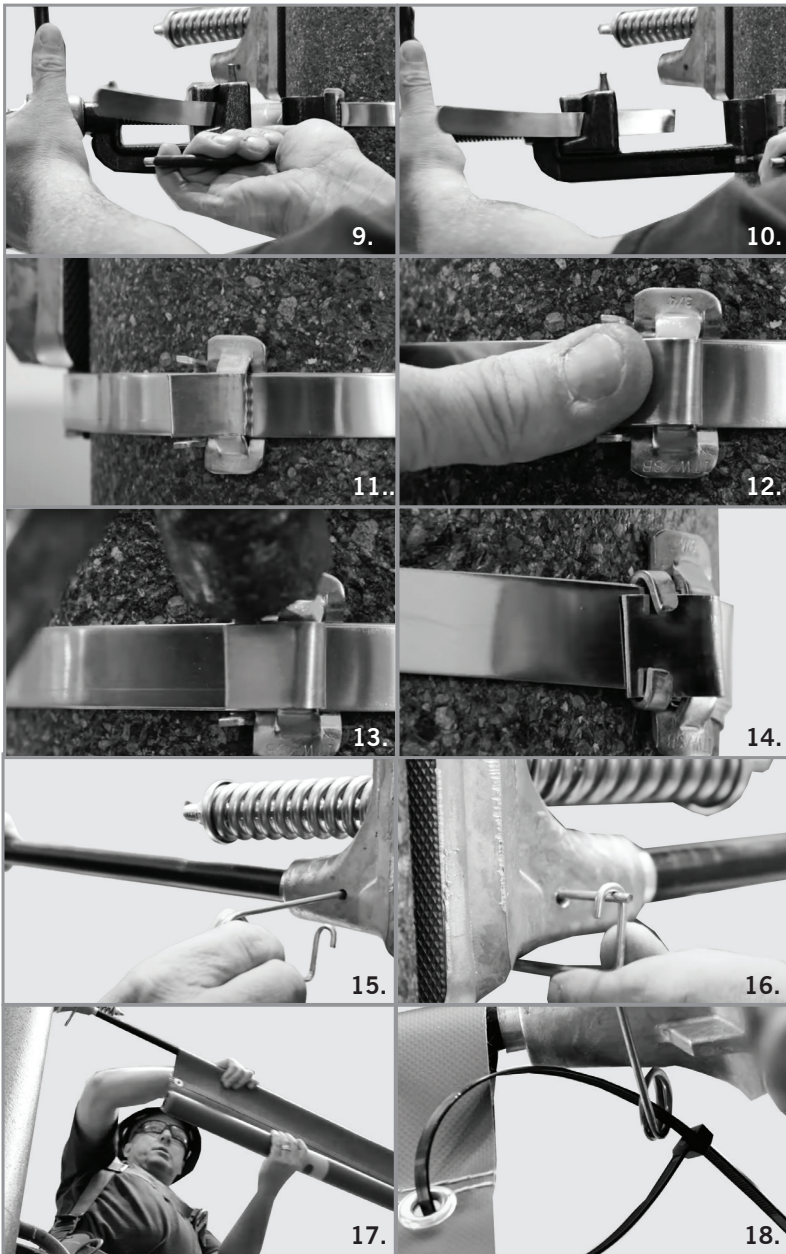

9. Push the tool towards the buckle. Moving the tool without backing off the tension could break the band.

10. Cut the excess banding with the cutting tool. There is a lever on the side that you will pull towards you to accomplish this. Pull the lever in a quick motion.

11. Make any adjustments now, because once the hardware is in place, it is hard to make any adjustments.

12. Bend the remaining band down onto the buckle with your thumb.

13. Hammer the ears of the buckle down to keep the remaining band in place.

14. Once the ears are hammered down, remove the tape from the hardware. Repeat the above process for the second band.


15. Place the pole with the metal sleeve into the bracket and align the holes to put the pin through.

16. Secure the pin into place.

17. Slide the banner onto the fiberglass poles.

18. Secure the banner to the bracket with the zip tie. The zip tie will go through the pin and through the grommet. Snip the zip ties with the tin snips or scissors.

ASSEMBLY

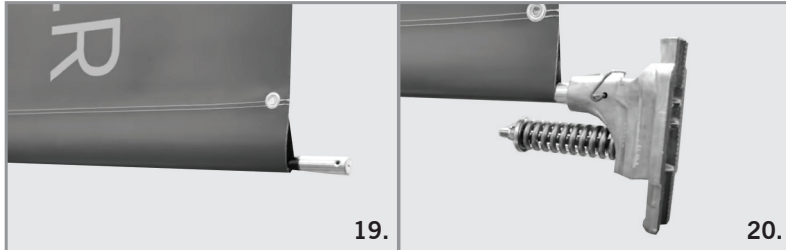

19. Place a pole in the bottom pole sleeve. The metal sleeve should go through first, so it is closest to the pole.

20. Attach the bracket to the bottom pole and secure it with the pin.



21. Push the bracket to the pole and secure it with the band. Securing the band on the bottom has the same process as the top section.

22. Your banner, or banners, are now ready to go!

